


# Tif OS



Kcal = Watt x 0.860  
BTU = Watt x 3.413


Watt  $\Delta t$  60° = Watt  $\Delta t$  50° x 1.264  
Watt  $\Delta t$  40° = Watt  $\Delta t$  50° x 0.750  
Watt  $\Delta t$  30° = Watt  $\Delta t$  50° x 0.518  
Watt  $\Delta t$  20° = Watt  $\Delta t$  50° x 0.307

p max = 10.0 bar

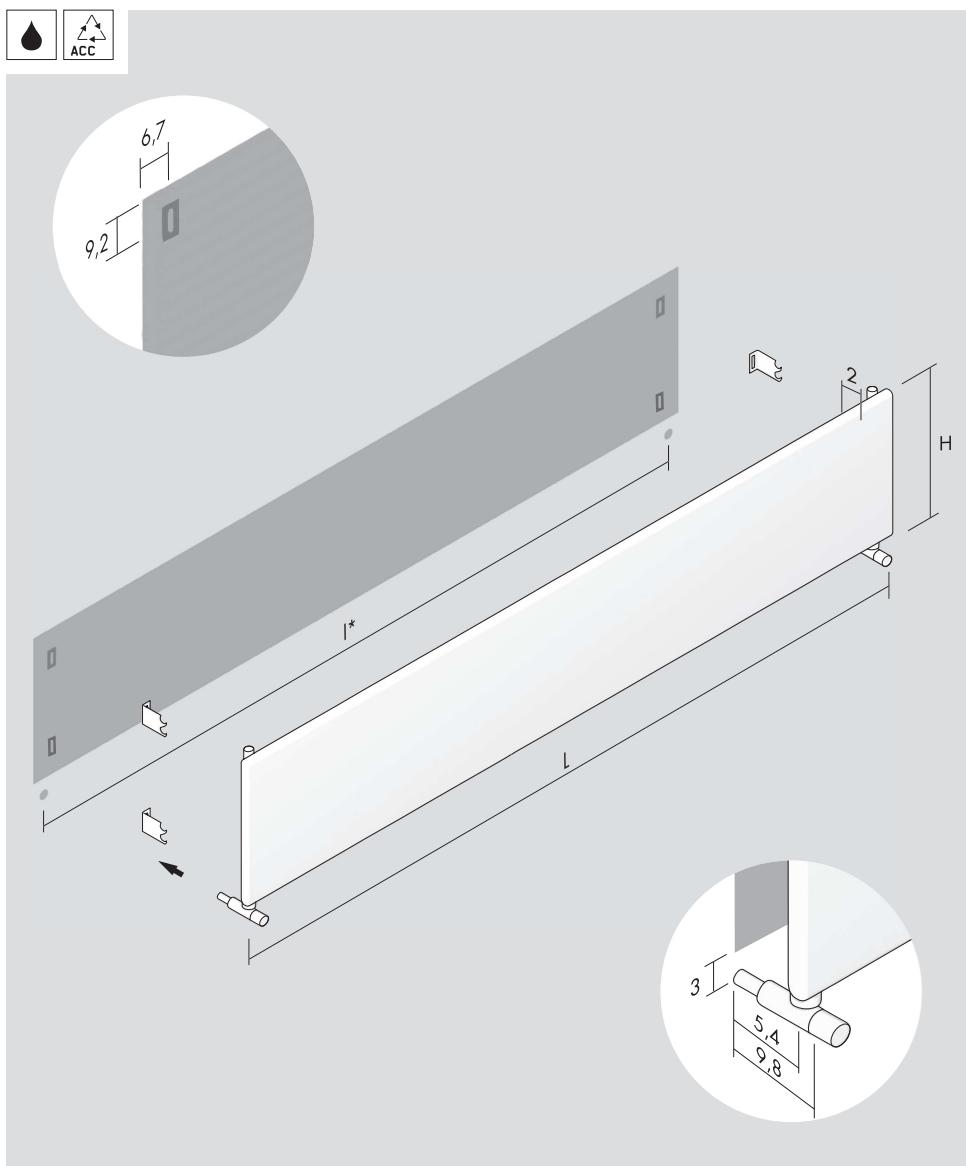


Standard connection / Raccord standard  
Standard Anschluss / Conexión estándar

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

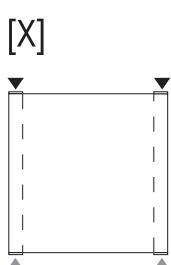


[C\_]




$z^* = 5,5$

[E\_]




$z^* > 5,5$

[G\_]




$z^* = 5,5$



[M\_]



$z^* = 5,5$

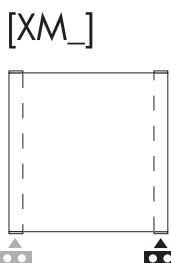


[XM\_]



$z^* = 5,5$

[M5\_]



$z^* > 5,5$

Replace \_ with connection S (Left) or D (Right). / Remplacer le \_ avec raccordement S (Gauche) ou D (Droite). / Um linker oder rechter Anschluss zu bestellen, bitte das Symbol \_ mit S (links) oder D (rechts) ersetzen. / Sustituir el \_ con las conexiones S (Izquierda) o D (Derecha).

$I^*$  = pipe centres / distance entre départ et retour / Achsabstand / distancia entre las conexiones

## Tif OS

UNI EN 442       $\Delta t = 50^\circ$      $75^\circ/65^\circ/20^\circ$   
 $\Delta t = 30^\circ$      $55^\circ/45^\circ/20^\circ$

H cm	L cm				art*	lt*	watt $\Delta t = 30^\circ$	watt $\Delta t = 50^\circ$
39.8	103.0	96.0	45.8		<b>TO25S103010_</b>	4.6	178	<b>344</b>
39.8	123.0	116.0	45.8		<b>TO25S123010_</b>	5.4	214	<b>413</b>
39.8	153.0	146.0	45.8		<b>TO25S153010_</b>	6.5	268	<b>517</b>
39.8	173.0	166.0	45.8		<b>TO25S173010_</b>	7.3	303	<b>585</b>
39.8	203.0	196.0	45.8		<b>TO25S203010_</b>	8.5	357	<b>689</b>
54.2	103.0	96.0	60.2		<b>TO25S103014_</b>	6.4	250	<b>482</b>
54.2	123.0	116.0	60.2		<b>TO25S123014_</b>	7.5	299	<b>578</b>
54.2	153.0	146.0	60.2		<b>TO25S153014_</b>	9.2	375	<b>723</b>
54.2	173.0	166.0	60.2		<b>TO25S173014_</b>	10.3	425	<b>820</b>
54.2	203.0	196.0	60.2		<b>TO25S203014_</b>	11.9	499	<b>964</b>
68.6	173.0	166.0	74.6		<b>TO25S173018_</b>	13.2	546	<b>1 054</b>
68.6	203.0	196.0	74.6		<b>TO25S203018_</b>	15.4	642	<b>1 239</b>


### Optional



(P\* = 224)



(P\* = 226)

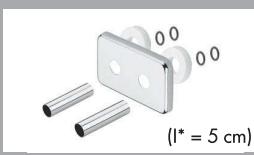

(I\* = 5 cm)



Angled Valve  
Vanne équerre  
Eckausführung Ventil  
Válvula a escuadra

[BIAN] **E12SQB**  
[CROM] **E12SQR**

Thermostatic head  
Tête thermostatique  
Thermostatkopf  
Cabezal termostático

[BIAN] **TTB**  
[CROM] **TTR**

Sleeving kit  
Kit couvre tuyau  
Rosetten  
Kit cubre tubo

[BIAN] **C5B**  
[CROM] **C5R**

$\emptyset \leq 16$  mm  
[BIAN] **CTB**  
[CROM] **CTR**

$16 \text{ mm} < \emptyset < 24$  mm  
[BIAN] **CWB**  
[CROM] **CWR**

art\* = item / modèle / Artikel / artículo      I\* = pipe centres / distance entre départ et retour / Achsabstand / distancia entre las conexiones

lt\* = water content for each element / volume d'eau pour chaque élément / Wassergehalt für Element / contenido de agua por cada elemento

P\* = page / page / Seite / página